


**Notes:**

- 1) All dimensions in inches.
- 2) Supplied with 3/4" bolt & nut.
- 3) Hot-dipped galvanized per ASTM A123.

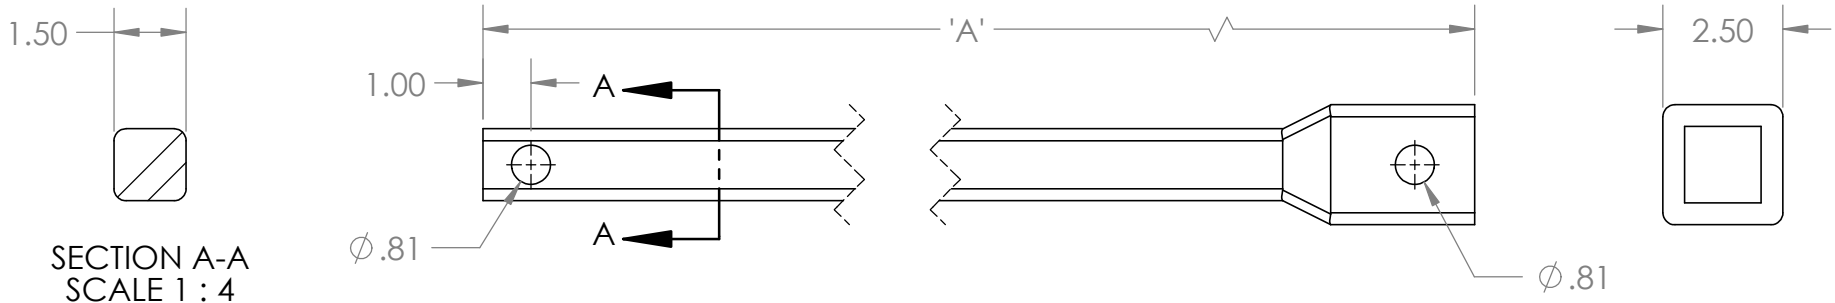

SECTION A-A  
SCALE 1 : 4

Part Number	'A'	WEIGHT (LBS)	TORQUE RATING (FT-LB)	TENSION RATING (LBS)
G6616U7	3.5'	30	7,000	70,000
G6620U7	5'	40	7,000	70,000
G6625U7	7'	55	7,000	70,000

<b>Unless otherwise noted:</b>			
All dimensions are in inches			
Degrees: +/- 5.0			
0 place decimal: +/- 0.1			
1 place decimal: +/- 0.01			
2 place decimal: +/- 0.03			
<b>B</b>	<b>8/7/2023</b>	<b>112</b>	
<b>A</b>	<b>1/25/2023</b>	<b>-</b>	
<b>REV</b>	<b>REV DATE</b>	<b>ECR #</b>	



<b>MATERIAL:</b> 1-1/2" ROUND CORNERED SQUARE STEEL BAR PER ASTM A29/A29M-16		POWER-GRIP SQUARE SHAFT ANCHOR EXTENSION DATA SHEET	
<b>P/N:</b> POWER-GRIP SQUARE SHAFT ANCHOR EXTENSION - DATA SHEET			
<b>WEIGHT:</b> SEE TABLE	<b>Date:</b> 1/25/2023	<b>DRAWN BY:</b> JM	<b>Rev:</b> B