


Notes:

- 1) All dimensions in inches.
- 2) Supplied with 3/4" bolt & nut.
- 3) Hot-dipped galvanized per ASTM A123.

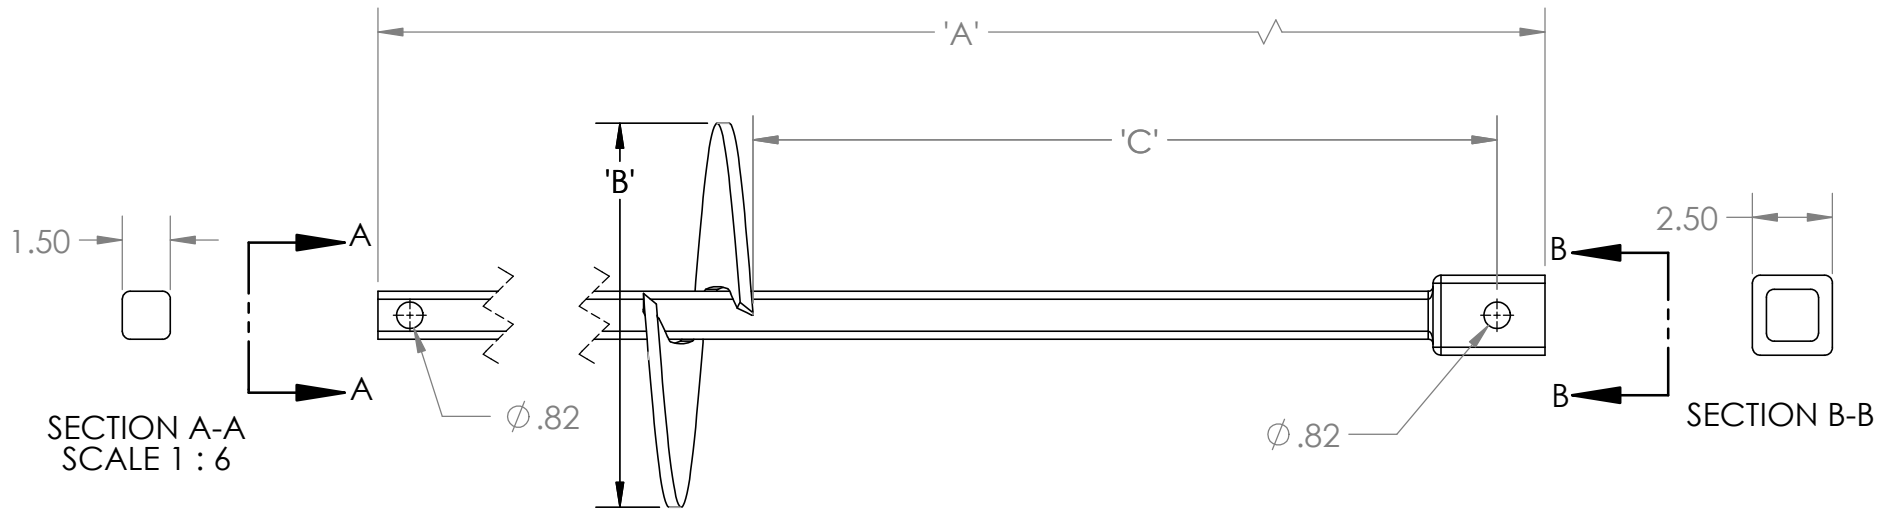

Part Number	'A'	'B'	'C'	WEIGHT (LBS)	TORQUE RATING (FT-LB)	TENSION RATING (LBS)
G6616UC7	3.5'	12"	23.5	42	7,000	70,000
G6616UD7	3.5'	14"	29.5	46	7,000	70,000

Unless otherwise noted:

All dimensions are in inches

Degrees: +/- 5.0

0 place decimal: +/- 0.1

1 place decimal: +/- 0.01

2 place decimal: +/- 0.03

B	2/6/2024	141
A	5/8/2023	-
REV	REV DATE	ECR #

Grip-Tite
UTILITY**MATERIAL:** 1-1/2" ROUND CORNERED
SQUARE STEEL BAR PER ASTM
A29/A29M-16 & 3/8" ASTM
STEEL PLATE PER ASTM A1018POWER-GRIP SQUARE SHAFT
ANCHOR EXTENSION WITH
HELICAL DATA SHEET**P/N:** POWER-GRIP SQUARE SHAFT ANCHOR WITH HELICAL EXTENSION - DATA SHEET**WEIGHT:**SEE TABLE**Date:** 5/8/2023**DRAWN BY:** JM **Rev:**B